

## 高冲击力扇形喷嘴 - P 系列

适用于  
食品、造纸等行业高冲击力清洗




### 设计特点

- 能够产生高冲击力的扇形水流
- 喷雾水流均匀,液滴大小中等
- 畅通口径较大,不易堵塞
- 广泛应用于强力清洗

### 一般应用

- 消泡
- 冲洗毛毯、网布
- 高冲击力洗涤
- 清除油渍污渍
- PCB 清洗段
- 电镀线冲洗
- 农产品清洗
- 钣金件前处理清洗


### P



喷雾形状



造纸厂网布清洗

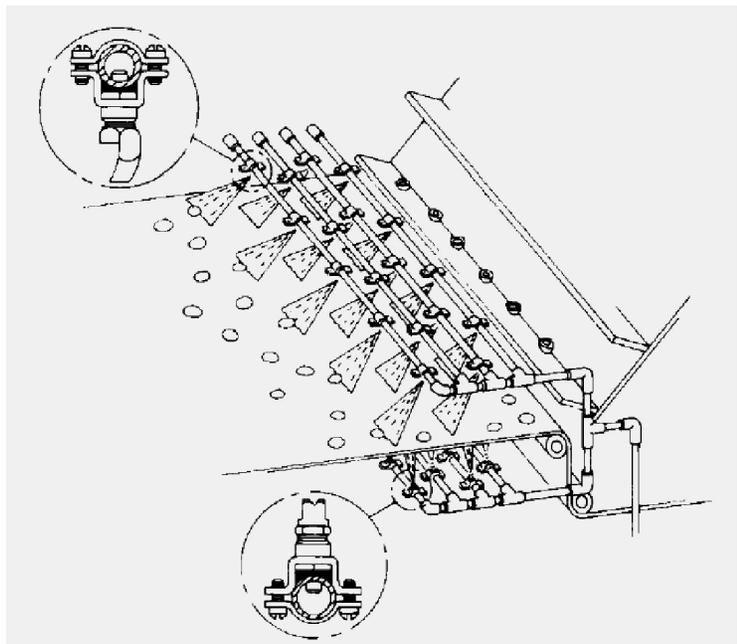

农产品清洗

性能参数

喷射角度	连接尺寸 (英寸)					流量 编码	喷嘴 口径 (mm)	流量 L/min @压力bar								喷射角度			外形尺寸			金属 喷嘴 净重 (Kg)
	1/8	1/4	3/8	1/2	3/4			1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	10 bar	1 bar	3 bar	7 bar	A	B	C	
																			mm	偏转 角度	方棒 尺寸	
50°		●				5010	2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	34°	50°	60°	31	60°	15.9	0.03
		●	●			5025	2.8	5.7	8.1	9.9	11.4	12.7	14.0	15.1	18.0	42°	50°	59°	41.5	42°	19.1	0.09
		●	●	●		5040	3.6	9.1	12.9	15.8	18.2	20	22	24	29	39°	50°	60°	47	45°	19.1	0.09
			●	●	●	5060	4.8	13.7	19.3	24	27	31	33	36	43	42°	50°	53°	55	37°	25.4	0.14
				●	●	50100	6.0	23	32	39	46	51	56	60	72	43°	50°	55°	72	40°	31.8	0.33
				●	●	50125	6.7	28	40	49	57	64	70	75	90	38°	50°	59°	72	38°	31.8	0.31
				●	●	50160	7.5	36	52	63	73	82	89	96	115	44°	50°	55°	72	37°	31.8	0.31
				●	●	50200	8.3	46	64	79	91	102	112	121	144	46°	50°	53°	72	32°	31.8	0.31
40°			●			4040	3.6	9.1	12.9	15.8	18.2	20	22	24	29	31°	40°	50°	60.5	35°	22.2	0.14
			●	●		4050	4.0	11.4	16.1	19.7	23	25	28	30	36	31°	40°	49°	63.5	33°	25.4	0.20
			●	●	●	4060	4.4	13.7	19.3	24	27	31	33	36	43	32°	40°	49°	72	33°	25.4	0.23
			●	●	●	4070	5.2	16.0	23	28	32	36	39	42	50	32°	40°	49°	75.5	29°	25.4	0.26
			●	●	●	4080	5.2	18.2	26	32	36	41	45	48	58	32°	40°	48°	77	26°	25.4	0.26
			●	●	●	4090	5.6	21	29	36	41	46	50	54	65	34°	40°	44°	77	28°	25.4	0.23
			●	●	●	40100	6.0	23	32	39	46	51	56	60	72	35°	40°	44°	86.5	28°	25.4	0.26
	35°	●					3504	1.2	0.91	1.3	1.6	1.8	2.0	2.2	2.4	2.9	20°	35°	41°	23	40°	11.1
		●				3510	2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	18°	35°	39°	36.5	36°	15.9	0.06
		●	●			3520	2.8	4.6	6.4	7.9	9.1	10.2	11.2	12.1	14.4	24°	35°	40°	42	30°	19.1	0.06
			●	●		3525	2.8	5.7	8.1	9.9	11.4	12.7	14.0	15.1	18.0	24°	35°	39°	49	28°	19.1	0.09
			●	●	●	3530	3.2	6.8	9.7	11.8	13.7	15.3	16.7	18.1	22	26°	35°	41°	52.5	28°	19.1	0.09
			●	●	●	3540	3.6	9.1	12.9	15.8	18.2	20	22	24	29	28°	35°	38°	58	26°	22.2	0.11
			●	●	●	3550	4.0	11.4	16.1	19.7	23	25	28	30	36	31°	35°	38°	63.5	23°	22.2	0.14
				●	●	3560	4.4	13.7	19.3	24	27	31	33	36	43	29°	35°	39°	73	27°	25.4	0.23
				●	●	3580	5.2	18.2	26	32	36	41	45	48	58	26°	35°	40°	81	24°	25.4	0.26
				●	●	35100	6.0	23	32	39	46	51	56	60	72	26°	35°	40°	89	19°	25.4	0.26
				●	●	35160	7.5	36	52	63	73	82	89	96	115	26°	35°	40°	114	23°	31.8	0.57
				●	●	35200	8.3	46	64	79	91	102	112	121	144	25°	35°	40°	122	22°	31.8	0.57
25°		●				2540	3.6	3.6	3.6	15.8	15.8	20	22	24	29	15°	25°	40°	65	25°	19.1	0.11
		●				1510	2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	6°	15°	23°	47.5	22°	15.9	0.06
		●	●			1520	2.8	4.6	6.4	7.9	9.1	10.2	11.2	12.1	14.4	8°	15°	19°	54	19°	15.9	0.06
			●	●		1530	3.2	6.8	9.7	11.8	13.7	15.3	16.7	18.1	22	9°	15°	24°	72	25°	19.1	0.11
			●	●	●	1540	3.6	9.1	12.9	15.8	18.2	20	22	24	29	9°	15°	21°	92	18°	22.2	0.23
			●	●	●	1550	4.4	11.4	16.1	19.7	23	25	28	30	36	10°	15°	20°	90.5	15°	22.2	0.17
				●	●	1560	4.8	13.7	19.3	24	27	31	33	36	43	10°	15°	19°	125	14°	25.4	0.34
				●	●	1580	5.2	18.2	26	32	36	41	45	48	58	11°	15°	18°	130	14°	25.4	0.34
				●	●	15100	6.0	23	32	39	46	51	56	60	72	11°	15°	18°	137	14°	25.4	0.40
				●	●	15200	8.3	46	64	79	91	102	112	121	144	12°	15°	18°	191	14°	31.8	0.91

注:

如无特殊说明, 连接尺寸, 一般均为标准英制螺牙 (BSPT)。如果需要美制螺牙 (NPT), 请另外标注。如需非标喷嘴, 请与我公司联系。

推荐附件

拼合孔连接器




可替代螺纹焊接底座, 有防泄漏垫圈, 详见 P94页

可调球接头



具有万向可调位置, 方便控制喷嘴的喷射方向, 详见 P93页

外形尺寸

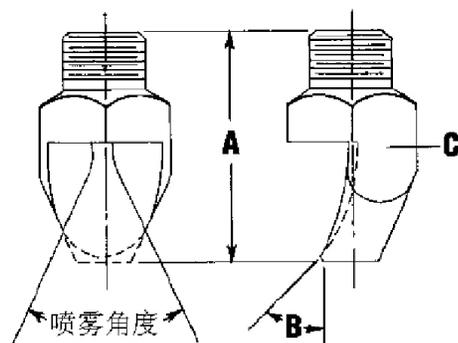

订购信息

1/4 P - SS 5010

连接尺寸 | 喷嘴型号 | 材料代码 | 流量编码

材料代码:

- SS : 303 不锈钢
- 316SS : 316 不锈钢
- BRASS : 黄铜
- PVC : 聚氯乙烯
- TEF : 聚四氟乙烯